

A

B

C

D

E

F

A

B

C





D

E

F

NOTES :

1. THE FOLLOWING INFORMATION IS OBTAINED FROM THE PROJECT DESIGN DRAWINGS:
 - a. POLE LENGTH AND STRENGTH.
 - b. SPECIAL FOUNDATION REQUIREMENTS.
 - c. POLE EMBEDMENT DEPTH.
 - d. CONDUCTOR SIZE.
 - e. CROSSARM SIZE AND BRACE REQUIREMENTS.
 - f. STAY REQUIREMENTS.
 - g. DEVIATION ANGLE.
2. THE MAXIMUM LINE DEVIATION ANGLE TO BE CONSTRUCTED ON THIS ARRANGEMENT IS TO BE DETERMINED BY THE LINE DESIGNER.
3. POLE STEPS ARE TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF NS128.
4. IN AREAS WHERE THE 11kV NETWORK CANNOT BE WORKED ON USING LIVE LINE TECHNIQUES, UNDERBUILT CIRCUITS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 1200mm. IN AREAS WHERE THE 11kV NETWORK CAN BE WORKED ON USING LIVE LINE TECHNIQUES, UNDERBUILT CIRCUITS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 2500mm.
5. THE LOAD AND DEVIATION ALLOWABLE ON THE EYEBOLT IS TO BE DETERMINED FROM DRG: 520324.
6. LONGROD INSULATORS ARE TO BE USED UNDER NORMAL CONDITIONS.
7. POLES SHALL BE DRILLED, SCARFED AND DRESSED ON SITE. DRILLING AND SCARFING TO BE TREATED WITH APPROVED PRESERVATIVES.
8. ALL BOLTS PASSING THROUGH TIMBER ARE TO BE COATED WITH GRAPHITE GREASE.
9. COMPOSITE FIBRE CROSSARMS ARE TO BE USED AS THE PREFERRED OPTION UNDER NORMAL CIRCUMSTANCES.
10. A 2706mm COMPOSITE FIBRE CROSSARM IS TO BE USED AS THE DEFAULT CROSSARM. FOR NARROW FEEDER ALIGNMENTS, A SHORTER CROSSARM MAY BE CONSIDERED TO OVERCOME DESIGN AND SITE CONSTRAINTS. A LONGER CROSSARM IS TO BE USED WHERE ADDITIONAL MID SPAN SEPARATION IS REQUIRED. A STEEL CROSSARM IS TO BE USED WHEN THE MAXIMUM LOAD OF THE ALTERNATE CROSSARMS IS EXCEEDED.
11. ONLY THE 2706mm COMPOSITE FIBRE CROSSARM OPTION IS SHOWN ON THIS CONSTRUCTION DRAWING. REFER TO DRGS: 262732, 514373, 15232 & 514377 FOR DRILLING PATTERN OF ALTERNATE CROSSARMS.
12. THE 690mm CROSSARM BRACES ARE TO BE USED ON A 2706mm, 2700mm, 3006mm & 3000mm CROSSARM. THE 740mm CROSSARM BRACE IS TO BE USED ON A 2406mm & 2400mm CROSSARM.
13. FOR DETAILS OF APPROVED ALTERNATE WAGNER COMPOSITE FIBRE CROSSARMS, REFER TO DRG: 265964.
14. WHEN SPECIFYING WAGNER COMPOSITE FIBRE CROSSARMS, A REVIEW OF ALL THE HARDWARE ATTACHED TO THE CROSSARM WILL BE REQUIRED.
15. REFER TO DESIGNER SAFETY REPORT D23/214051 FOR ATYPICAL HAZARDS ASSOCIATED WITH THIS STANDARD CONSTRUCTION.

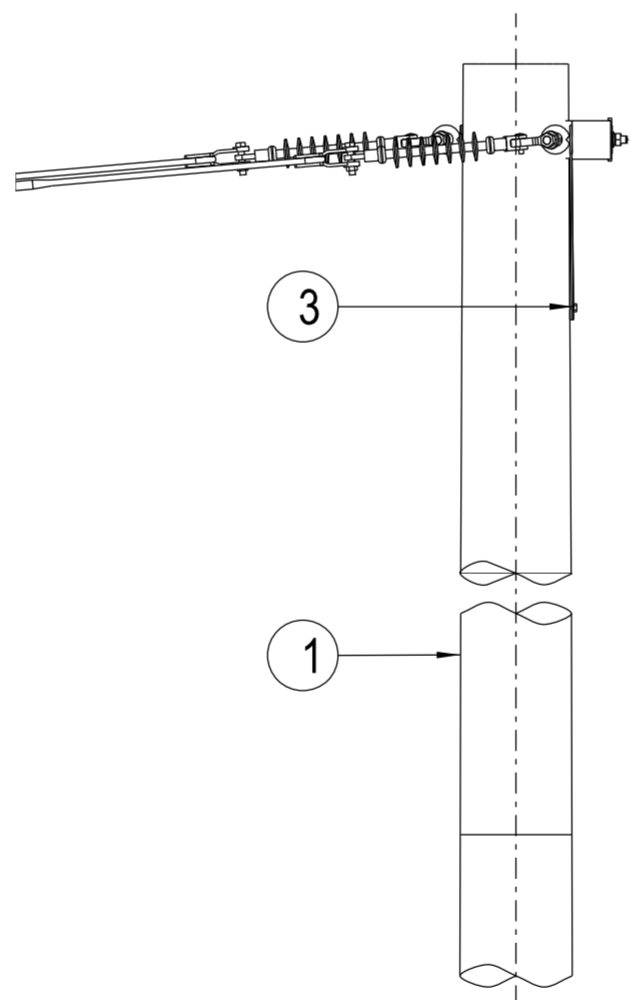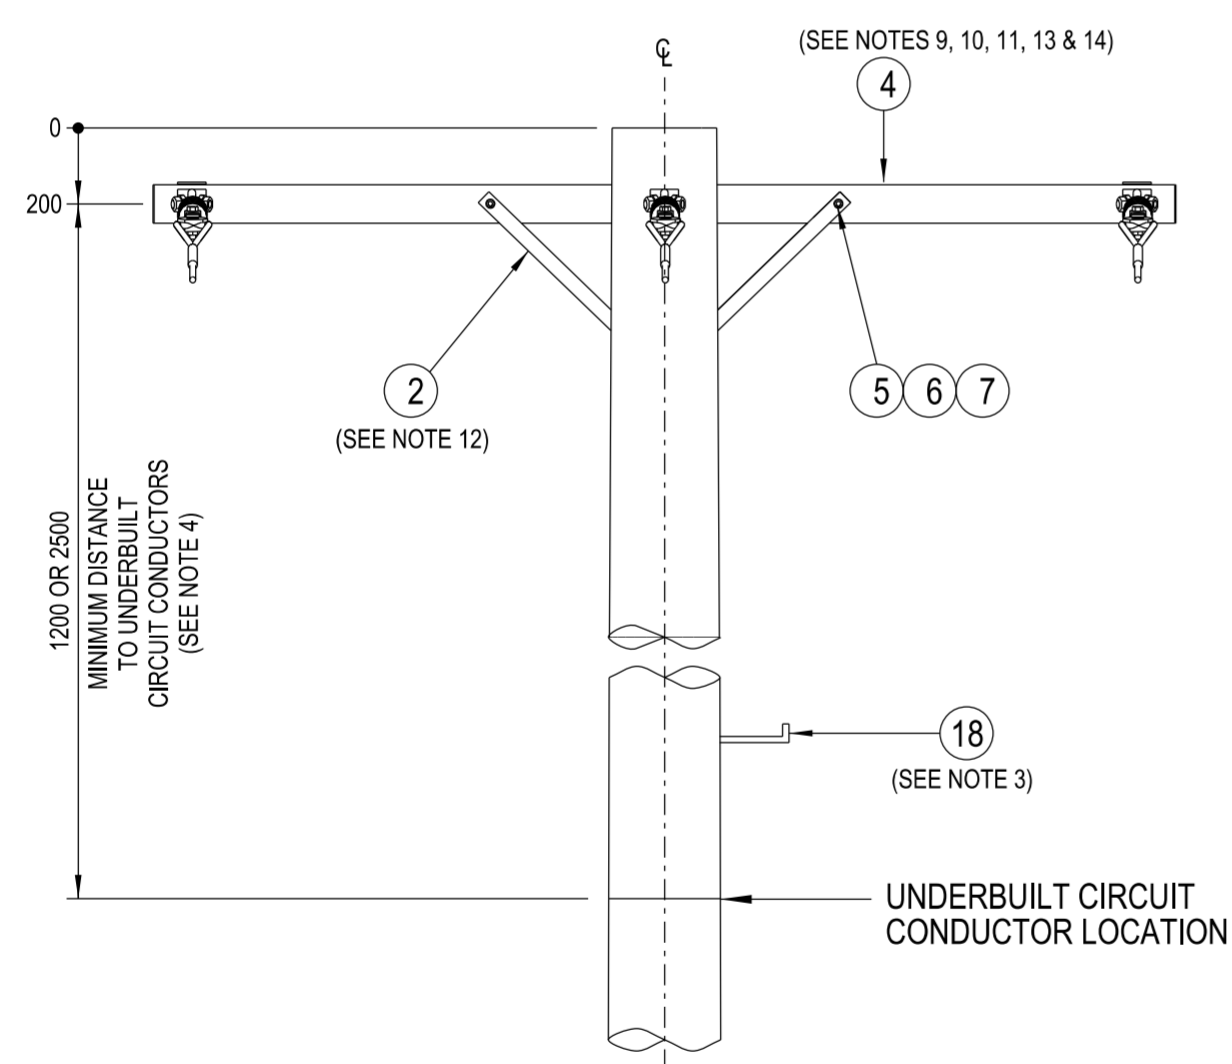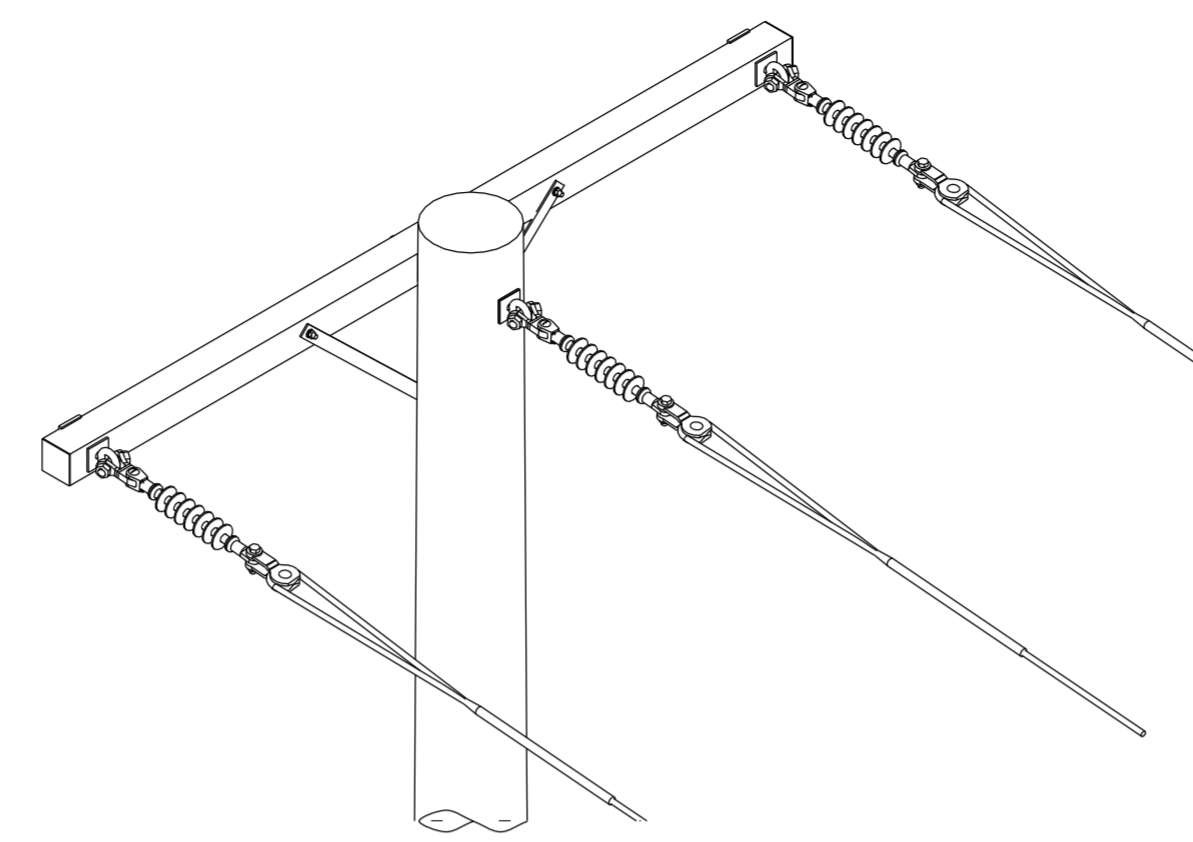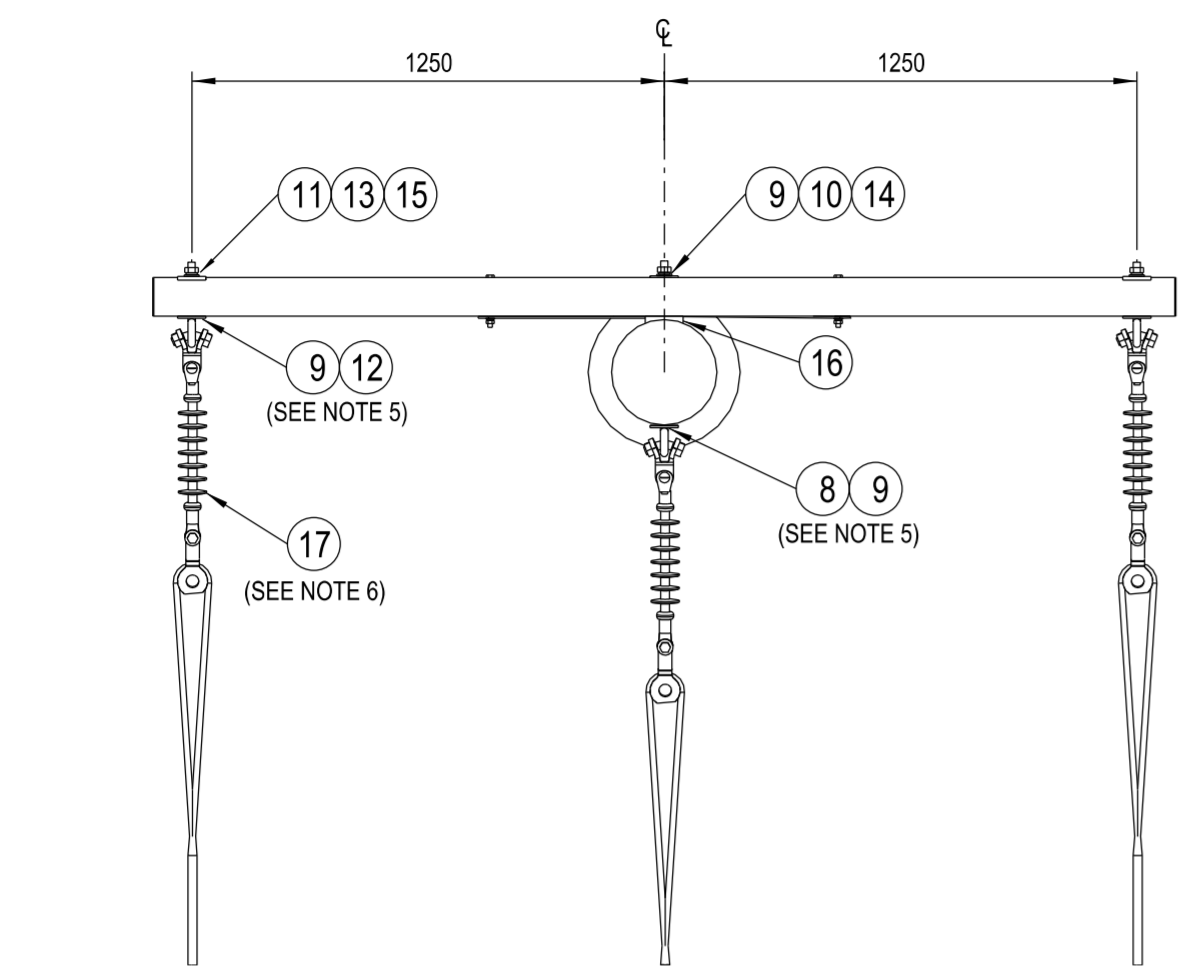

ITEM	DESCRIPTION	DRG. No	STOCK CODE	QTY
18	STEP - POLE, SCREW-IN (SEE NOTE 3)	250144	185198	A/R
17	INSULATOR - 11/22kV LONGROD, STRING ARRANGEMENT AR-2 (SEE NOTE 6)	565715		3
16	BLOCK - GAIN, ALUMINIUM, 100mm		146274	1
15	WASHER - FLAT, M20, GALVANISED (USE WITH 2700mm & 2400mm CROSSARMS)	518081	177986	2
14	WASHER - FLAT, M20, GALVANISED	518081	177986	1
13	WASHER - LIP, M24, GALVANISED	518081	176912	2
12	EYEBOLT - M20x200mm, GALVANISED (SEE NOTE 5)	513653	H37881	2
11	WASHER - CONICAL, M20, GALVANISED (USE WITH HARDWOOD CROSSARMS)	518082	H39655	2
	WASHER - SPRING, M20, GALVANISED (USE WITH COMPOSITE FIBRE & STEEL CROSSARMS)	518082	175569	
10	WASHER - CONICAL, M20, GALVANISED	518082	H39655	1
9	WASHER - SQUARE, 75x75x6mm, GALVANISED (Ø22mm HOLE)	518081	H39231	4
8	EYEBOLT - M20, GALVANISED (LENGTH TO SUIT POLE) (SEE NOTE 5)	513653		1
	WASHER - CONICAL, M12, GALVANISED (USE WITH 2400mm CROSSARM)	518082	H39639	1
	WASHER - CONICAL, M12, GALVANISED (USE WITH 2700mm CROSSARM)	518082	H39639	2
	WASHER - SPRING, M12, GALVANISED (USE WITH 2406mm CROSSARM)	51082	H12047	1
7	WASHER - SPRING, M12, GALVANISED (USE WITH 2706mm, 3006mm & 3000mm CROSSARMS)	518082	H12047	2
	WASHER - SPRING, M12, GALVANISED (USE WITH 2706mm, 3006mm & 3000mm CROSSARMS)	518082	H12047	2
6	WASHER - FLAT, M12, GALVANISED (USE WITH 2406mm & 2400mm CROSSARMS)	518081	177982	2
	WASHER - FLAT, M12, GALVANISED (USE WITH 2706mm, 2700mm, 3006mm & 3000mm CROSSARMS)	518081	177982	4
5	BOLT & NUT - M12x150mm, HEX., GALVANISED (USE WITH 2400mm CROSSARM)	515466	46847	1
	BOLT & NUT - M12x180mm, HEX., GALVANISED (USE WITH 2700mm & 3000mm CROSSARMS)	515466	46888	2
	BOLT & NUT - M12x130mm, HEX., GALVANISED (USE WITH 2406mm CROSSARM)	515466	46805	1
	BOLT & NUT - M12x130mm, HEX., GALVANISED (USE WITH 2706mm & 3006mm CROSSARMS)	515466	46805	2
4	CROSSARM - 3000x150x100x5mm, RHS, GALVANISED (SEE NOTES 9, 10, 11, 13 & 14)	514377	H23787	1
	CROSSARM - 2400x125x100mm, TYPE H2, HARDWOOD (SEE NOTES 9, 10, 11, 13 & 14)	15232	71910	
	CROSSARM - 2700x150x100mm, TYPE C, HARDWOOD (SEE NOTES 9, 10, 11, 13 & 14)	514373	H23907	
	CROSSARM - 3006x102x102mm, TYPE 13, COMPOSITE FIBRE (SEE NOTES 9, 10, 11, 13 & 14)	262732	186783	
	CROSSARM - 2406x102x102mm, TYPE 11, COMPOSITE FIBRE (SEE NOTES 9, 10, 11, 13 & 14)	262732	186781	
3	CROSSARM - 2706x102x102mm, TYPE 12, COMPOSITE FIBRE (SEE NOTES 9, 10, 11, 13 & 14)	262732	186782	1
	SCREW - COACH, M12 x 100mm, GALVANISED		H40484	
2	BRACE - CROSSARM, ANGLE, TYPE H, 740mm, GALVANISED (SEE NOTE 12)	46	99119	1
	BRACE - CROSSARM, FLAT, 690mm, GALVANISED (SEE NOTE 12)	514385	H17738	2
1	POLE - TIMBER (AS REQUIRED)	513988		1

ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE. DO NOT SCALE.

CAD DRAWING DO NOT MANUALLY AMEND AMENDMENTS	DATE: 08/12/2023 NOTES & MATERIAL LIST AMENDED, ASSOCIATED DRAWING ADDED.	DATE: 08/12/2023 WAGNER CROSSARM OPTION REMOVED FROM MATERIAL LIST, NOTES ADDED.
DWN: P.R.	APPD: G.F.	APPD: G.F.
CHKD: P.J.	APPD: G.F.	APPD: G.F.
APPD: G.F.	APPD: G.F.	APPD: G.F.

DESCRIPTION	DRG. No
COMPOSITE FIBRE CROSSARMS WAGNER SPECIFICATION	265964
2700mm CROSSARMS FOR LV, 11kV, 22kV AND 33kV CONSTRUCTION DETAILS	514373
COMPOSITE FIBRE CROSSARMS SPECIFICATION	262732
HV TERMINATION STEEL CROSSARM CONSTRUCTION DETAILS	514377
WOODEN CROSSARMS FOR 11kV LINES	15232
20mm EYEBOLT LOADING & DEVIATION GRAPH	520324

NETWORK STANDARD

 145 NEWCASTLE RD WALLSEND, NSW 2287

SCALE	1:20	STANDARD CONSTRUCTION 11kV TERMINATION CONSTRUCTION 2-10	SIZE A2	DRAWING No 513914	SHEET 1	AMD 14
DESIGNED	-					
DRAWN	PATRICIA RIOS					
CHECKED	W.G					
APPROVED	I.NICHOLS					
DATE	07/11/94					
PROJECT NUMBER	STD					
PROJTRAK NUMBER	-					